

MC568

TECHNICAL BULLETIN

RELEASE

RELEASE is an alkaline-based concentrated floor finish stripper. Its special composition easily removes old layers of acrylic floor finishes or wax emulsions

BENEFITS:

- Perfect strength
- Can be applied with a single disc machine, an automatic scrubber, or with a damp mop

USES:


All natural stones and tiles

METHOD OF APPLICATION:

1. Dilute at 1:10 parts of water for light duty stripping
2. Dilute at 1:3 parts of water for heavy duty stripping
3. Recommended dilute the chemical with hot water for additional strength
4. Apply full strength when removing sealers or heaviest accumulation of wax and allow it to stand for about 5 minutes
5. Pour solution evenly onto the surface to be clean
6. Allow it to react for 5 minutes. Use a single disc scrubbing machine with a black pad. Vacuum up the soiled water. Rinse the cleaned areas thoroughly with excess water to remove all residues and dry the floor

LIMITATIONS:

NOT recommended to use on linoleum and asphalt

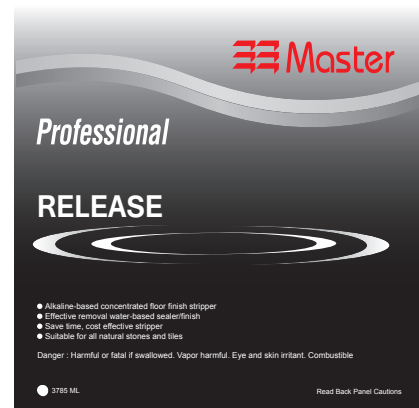

HANDLING AND STORAGE:

- Avoid direct contact with eyes
- Rubber gloves are recommended
- Keep container closed to prevent contamination
- Store between 10°C to 40°C (50°F to 104°F)
- Avoid prolonged exposure to high temperature, direct sunlight and/or high humidity

CAUTION:

- **KEEP OUT OF REACH OF CHILDREN**
- Do not take internally
- **IF INGESTED:** Drink large quantity of water. Seek for medical attention immediately
- **IF INHALED:** Move to fresh air
- **EYE CONTACT:** Flush with water for at least 15 minutes and seek medical attention
- **SKIN CONTACT:** Wash skin with soap and water. If irritation persists, seek immediate medical attention